

Vehicle Data

Vehicle Type	4x2	6x2		
Cab Type	Day Cab (2.2m)			
Front Axle Capacity (Technical)	8T	8T		
Rear Axle Capacity (Technical)	11.5T	11.5T		
Trailing Axle Capacity (Technical)	-	7.5T		
Permissible Gross Weight	19T	27T		
Kerb Weight*	7.9T	9.3T		
Suspension	Parabolic Front Leaf Spring / Air Rear			
Rear Steerable Axle	-	Yes		
Tyre Sizes	315/70 & 315/80			
Steering	Left Hand Drive - Hydraulic			
Transmission	Central Drive (3 Speed)			

Electric Features

Vehicle Continuous Power	235 kW (319 PS)	310 kW (421 PS)		
Vehicle Peak Power	290 kW (394 PS)	390 kW (530 PS)		
Installed Battery Capacity	294 kWh	392 kWh		
Usable Battery Capacity	235 kWh	314 kWh		
Battery Chemistry	LI-Ion, NMC			
Charging Type	CCS2, DC Charge – Up to 350 kW, 500A			
Charging Time**	20% - 80% in <45 min.			
Range***	Up to 250 km	Up to 300 km		
Regenerative Braking Power	390kW	390kW		
e-PTO Power (Cont/Max)	80kW / 100kW			

Warranty Terms

Vehicle Warranty	2 yea	2 years		
Battery Warranty****	8 years or 400.000 km	8 years or 450.000 km		

^{*}Depends on vehicle configuration.


^{**}Based on optimum conditions at ambient temperature of 30°C by DC charging.

^{***}Range depends on factors such as driving style type, type of use, type of road and ambient temperature.

^{****} Year or km whichever comes first limited with 570 MWh (for 4x2 vehicles) and 760 MWh (for 6x2 vehicles) energy throughput.




Wheelbase (WB)	4250 mm	4750 mm	5500 mm
Rear Overhang (ROH)	2343 mm	2343 mm	1350 mm

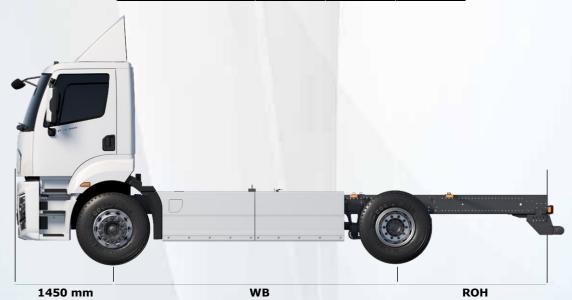

Wheelbase (WB)	4250 mm	4750 mm	5500 mm	6550 mm
Rear Overhang (ROH)	2300 mm	2650 mm	2480 mm	2395 mm



4x2 4250 WB Axle Configuration C4AS Suspension

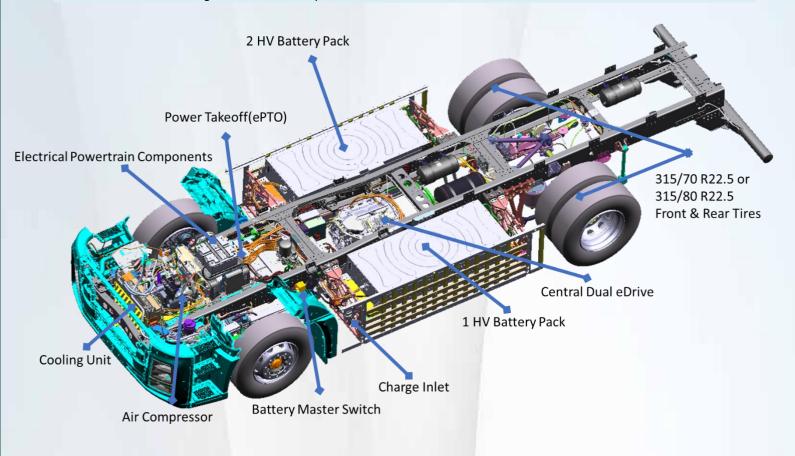

6x2 4250 WB Axle Configuration RSA Suspension

