
## FORD TRUCKS 3542D EURO6



Transmission			
Clutch	430 mm Single Disc		
Manuel Transmission / Ratios (1.gear - 16. gear)	ZF 16S 2530 (13,805-0,836)		
Automated Transmission / Ratios (1.gear - 16. gear)	Ecotorq 16S 2600 OD (14,107 - 0,823)		
Steering			
	Power assisted single circuit		
Chassis			
Chassis Thickness	10 mm with Reinforcement		
Chassis Strength	500 MPa		
Suspension (Front / Rear)	90 mm Parabolic Leaf Springs / 100 mm Multileaf Tandem Suspension		
Axle	Hub Reduction		
Axle Ratio (Manual / Automatic)	4,08 / 3,57		
Tyres	315/80 R 22,5		
	22,5 x 9 Steel		
Wheel Rim			
Braking System	410 X 200 Z-Cam Drum Brake System		
Braking System Brakes (Ø mm x mm Length)	410 X 200, Z-Cam Drum Brake System		
Braking System Brakes (Ø mm x mm Length) Braking System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater		
Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater max. 320 kW (Engine Level)		
Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power Retarder Power	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater		
Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power Retarder Power	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater max. 320 kW (Engine Level)		
Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power Retarder Power Electrical System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater max. 320 kW (Engine Level)		
Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power Retarder Power Electrical System Battery	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater max. 320 kW (Engine Level) max. 450 kW / continuous 160 kW		
Wheel Rim Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power Retarder Power Electrical System Battery Alternator / Starter Motor Tanks	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater max. 320 kW (Engine Level) max. 450 kW / continuous 160 kW 225 Ah		
Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power Retarder Power Electrical System Battery Alternator / Starter Motor	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater max. 320 kW (Engine Level) max. 450 kW / continuous 160 kW 225 Ah		

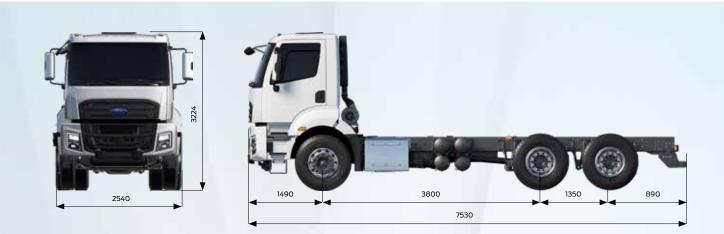

Sharing the load

Dimensions (mm)				
Front Overhang		14	90	
Wheelbase		38	00	
Overall Length		75	30	
Distance Between 2 <sup>nd</sup> and 3 <sup>th</sup> Wheel Centers		13!	50	
Overall Cab Length		18.	20	
Overall Vehicle Width (Excluding Mirrors)		25	40	
Chassis Width		77	0	
Rear Overhang		89	90	
Useful Chassis Length		51	35	
Chassis Height - Front		110	57	
Chassis Height - Rear		118	35	
Ground Clearance - Front		38	32	
Ground Clearance - Rear		26	54	
Turning Radius		87	90	
Weights (kg)	1. Axle	2. Axle	3. Axle	Total
Technically Permissible Weights	8000	13400	13400	34000
Kerb Weight	5258	2332	2323	9913
Payload	2742	11068	11077	24087
GVM (Legal)	8000	9500	9500	26000

## STANDARD EQUIPMENT

## Air Conditioner

- Multimedia System with 9" Touch Screen & Navigation (Radio, Bluetooth, USB (A Type - C Type), Apple CarPlay, Android Auto, Remote Control)
- 4 Points Independent Cab Suspension for Day Cab
- Transmission Offset (double gear) PTO without Flange & Interior Control Unit
- Cruise Control
- Engine Brake
- Drum Brake
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Switchable Air Compressor for Improved Fuel Economy
- Lumbar Support
- Front Vehicle Antiroll Bar
- Anti-Lock Brake System (ABS)
- Brake Lining Wear Indicator
- Immobilizer
- Home Safe Light
- Approach Light
- Differential Lock
- Digital Tachograph
- Front Towing Hooks (Double Hook)
- Oil Pan Protection
- Short Bumper
- DAB Radio\*\*
- DAB Radio
   Advanced Driver-Assistance Systems (Cybersecurity Improvements, Rear View Camera, Moving-off Information System, Blind Spot Information System, Tire Pressure Monitoring System, Emergency Stop Signal, Alcohol Interlock Facilitation, Traffic Sign Recognition, Driver Alert System, Lane Keeping Alert)
- Electronic Brake System (EBS) and Electronic Stability Control (ESP)
- Automatic Traction Control (ATC)

## **OPTIONAL EQUIPMENT**

- Transmission Driven PTO Options & Interior Control Unit
- Automated Transmission
   (With Normal Mode, Off-Road Mode, Rocking Mode)
- Engine Driven PTO\*
- Retarder
- ADR Pack
- Wet Type Cab Heater
- Cold Pack with Wet Type Cab Heater and 225 Ah Battery
- Power Cab Tilting
- Rear Window
- Double Passenger Seat
- O2 up to 3,5T towing capability
- O3 up to 10T towing capability
- Manually Operated Sunroof
- Vertical Exhaust
- Less Spare Tire
- Rear Towing Hook Option
- Twin PTO (high ratio) / Twin PTO (low ratio)\*\*\*
- Led Headlamps

\*\*DAB Radio can be standard or optional according to the market. \*\*\*Only available with Automated Transmission.

This leaflet includes products designed for Ford vehicles. It provides information about the current technical specifications and the standard or optional accessories available as of the date it was issued. Features of standard and optional accessories of the vehicles may be changed from time to time. For this reason, please consult our Authorized Dealers to obtain updated and accurate information on the features of the vehicle you wish to buy. For the aforementioned reason, this leaflet does not constitute an assurance as to the specifications listed herein. The images used in this leaflet may be different from the vehicles on sale. The technical specifications provided herein are for standard vehicles. Selection of any optional accessories might cause differences from these specifications.

<sup>\*</sup> Available for Firefighter Pack Only