

## FORD TRUCKS 3542M L EURO6



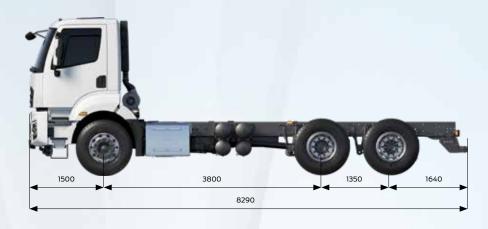

| Basic Features |         |
|----------------|---------|
| Vehicle Type   | Mixer   |
| Axle           | 6x4     |
| Emission       | Euro 6  |
| Cabin Type     | Day Cab |
| Wheelbase (mm) | 3800    |

 Engine

 Type
 Ecotorq 12,7 liters

 Displacement (cc)
 12740

 Bore x Stroke
 130 mm x 160 mm

 Power
 420 PS (308,9 kW ) / 1800 rpm

 Torque
 2150 Nm / 1000-1300 rpm

 Compression Ratio
 17 +/- 0,5 : 1

 Oil Filling Volume
 50 L

Coolant Volume 57 L (77 L with Retarder)

Transmission

Clutch 430 mm Single Disc Automated Transmission / Ratios (1. gear - 16. gear) Ecotorq 16S 2600 OD AMT (14,107 – 0,823)

Steering

Power Assisted Single Circuit

| Chassis                   |  |  |  |  |
|---------------------------|--|--|--|--|
| Chassis Thickness         | 8 mm with Local Reinforcement                        |  |  |  |
| Chassis Strength          | 500 MPa  |  |  |  |
| Suspension (Front / Rear) | Parabolic Leaf Springs / Parabolic Tandem Suspension |  |  |  |
| Axle                      | Single Reduction                                     |  |  |  |
| Axle Ratio                | 4,]]   |  |  |  |
| Tyres                     | 315/80 R 22,5  |  |  |  |
| Wheel Rim                 | 22,5 x 9 Steel                                       |  |  |  |

Wheel Rim

22,5 x 9 Steel

Braking System

Brakes (Ø mm x mm length)

430 x 45 - Disc Brakes

Braking System Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater

Engine Brake Power max. 320 kW (Engine Level)
Retarder Power max. 450 kW / continuous 160 kW

Electrical System
Battery

Battery 225 Ah Alternator / Starter Motor 130 A / 6,5 kW

 Tanks
 315 L Aluminium

 Fuel Tank
 55 L



| Dimensions (mm)  |      |
|--|------|
| Front Overhang   | 1500 |
| Wheelbase  | 3800 |
| Overall Length   | 8290 |
| Distance Between 2 <sup>nd</sup> and 3 <sup>th</sup> Wheel Centers | 1350 |
| Overall Cab Length   | 1820 |
| Overall Vehicle Height   | 3168 |
| Overall Vehicle Width (Excluding Mirrors)                          | 2540 |
| Chassis Width  | 770  |
| Rear Overhang  | 1640 |
| Useful Chassis Length  | 5885 |
| Chassis Height-Front   | 1126 |
| Chassis Height-Rear  | 1148 |
| Ground Clearance-Front   | 369  |
| Ground Clearance-Rear  | 294  |
| Turning Radius   | 8790 |

| Weights (kg)                    | 1. Axle | 2. Axle | 3. Axle | Total |
|---------------------------------|---------|---------|---------|-------|
| Technically Permissible Weights | 7500    | 10500   | 10500   | 28500 |
| Kerb Weight                     | 4839    | 2243    | 2050    | 9131  |
| Payload                         | 2661    | 8257    | 8450    | 19369 |

## STANDARD EQUIPMENT

- Air Conditioner
- Multimedia System with 9" Touch Screen & Navigation (Radio, Bluetooth, USB (A Type - C Type), Apple CarPlay, Android Auto, Remote Control)
- Air Suspended Cab
- Engine Driven PTO & Interior Control Unit
- Cruise Control
- Engine Brake
- Disc Brake
- Electrically Operated Windows
- Heated and Electrically Operated Side Mirrors
- Electrically Operated Headlamp Leveling
- Rake and Reach Adjustable Steering Column
- Electrically Operated and Heated Side Mirrors
- Lumbar Support
- Front and Rear Vehicle Antiroll Bars
- Anti-Lock Brake System (ABS)
- Continuous Wear Sensor
- Immobilizer
- Home Safe Light
- Approach Light
- Differential Lock
- Digital Tachograph
- Front Towing Hooks (Double Hook)
- Short Bumper
- DAB Radio\*
- Advanced Driver-Assistance Systems (Cybersecurity Improvements, Rear View Camera, Moving-off Information System, Blind Spot Information System, Tire Pressure Monitoring System, Emergency Stop Signal, Alcohol Interlock Facilitation, Traffic Sign Recognition, Driver Alert System, Lane Keeping Alert)
- Electronic Brake System (EBS) and Electronic Stability Control (ESP)
- Automatic Traction Control (ATC)

## **OPTIONAL EQUIPMENT**

- Transmission Direct (Single Gear) PTO with Flange (includes Power Take off Control Unit)
- Transmission Direct (Single Gear) PTO without Flange (includes Power Take off Control Unit)
- Transmission Offset (Double Gear) PTO without Flange (includes Power Take off Control Unit)
- Transmission Direct (Double Gear) PTO with Flange (includes Power Take off Control Unit)
- Retarder
- ADR Pack
- Auxiliary Cabin Heater (Wet Type)
- Cold Pack with Wet Type Cab Heater and 225 Ah Battery
- Power Cab Tilting
- Switchable Air Compressor for Improved Fuel Economy
- Manually Operated Sunroof
- Dual Passenger Seat
- Less Spare Tire
- Twin PTO (high ratio) / Twin PTO (low ratio)
- Hub Reduction
- 7 T Front Axle Capacity
- Aluminium Wheel Rim
- Vertical Exhaust
- Technology Pack (Pre-Collision Assist, Auto High-Beam Headlamps & Pre-Collision Assist with Pedestrian Detection)
- Rain Sensor
- Led Headlamps

<sup>\*</sup> DAB Radio can be standard or optional according to the market.