
FORD TRUCKS 4142D EURO6



Basic Features	Tinner			
Vehicle Type	Tipper			
Axle Emission	8x4			
	Euro 6			
Cabin Type	Day Cab			
Wheelbase (mm)	5100			
Engine				
Type	Ecotorq 12,7 litre			
Displacement (cc)	12740			
Diameter x Stroke	130 mm x 160 mm			
Power	420 PS (308,9 kW) / 1800 rpm			
Torque	2150 Nm / 1000-1300 rpm			
Compression Ratio	17 +/- 0,5 : 1			
Oil Filling Volume	50 L			
Coolant Volume	57 L (77 L with Retarder)			
Transmission				
Clutch	2 x 400 mmTwin Clutch			
Manuel Transmission / Ratios (1. gear - 16. gear)	ZF 16S 2530 (13,805-0,836)			
Automated Transmission / Ratios (1. gear - 16. gear)	Ecotorq 16S 2600 OD (14,107 - 0,823)			
Steering				
	Electro-Hydraulic Power-Assisted Steering System(EHPAS)			
Chassis				
Chassis Thickness	10 mm with Reinforcement			
Chassis Strength	500 MPa			
Suspension (Front / Rear)	90 mm Parabolic Leaf Springs / Reinforced Parabolic Suspension			
Axle	Hub Reduction			
Axle Ratio (Manual / Automatic)	4,87 / 4,08			
Tyres	315/80 R 22,5			
Wheel Rim	22,5 x 9 Steel			
Braking System				
Brakes (Ø mm x mm Length)	410 x 200, Z-Cam Drum Brake System			
Braking System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater			
Engine Brake Power	max. 320 kW (Engine Level)			
	max. 450 kW / Continuous 160 kW			
Retarder Power	11ax. 450 kW / Continuous 100 kW			
Retarder Power				
-	225 Ah			
Retarder Power Electrical System				
Retarder Power Electrical System Battery	225 Ah			
Retarder Power Electrical System Battery Alternator / Starter Motor	225 Ah			

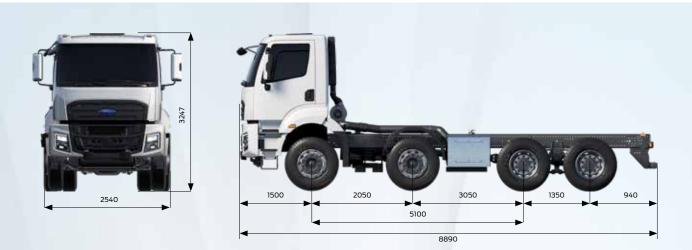

Dimensions (mm)					
Front Overhang			1500		
Wheelbase			5100		
Overall Length			8890		
Distance Between 1st and 2nd Wheel Centers			2050		
Distance Between 2 nd and 3 th Wheel Centers			3050		
Distance Between 3 th and 4 th Wheel Centers			1350		
Overall Cab Length			1820		
Total Vehicle Height			3245		
Overall Vehicle Width (Excluding Mirrors)			2540		
Chassis Width			770		
Rear Overhang			940		
Useful Chassis Length			6490		
Chassis Height - Front			1185		
Chassis Height - Rear			1186		
Ground Clearance - Front			380		
Ground Clearance - Rear			296		
Turning Radius			10640		
Weights (kg)	1. Axle	2. Axle	3. Axle	4. Axle	Total
Technically Permissible Weights	8000	8000	13400	13400	41900
Kerb Weight	3826	3765	2046	2045	11682
Payload	4174	4235	11354	11355	30218
GVM (Legal)	8000	8000	9500	9500	32000

STANDARD EQUIPMENT

- Manuel Air conditioner
- Multimedia System with 9" Touch Screen & Navigation (Radio, Bluetooth, USB (A Type - C Type), Apple CarPlay, Android Auto, Remote Control)
- 4 Points Independent Cab Suspension for Day Cab
- Transmission Offset (Double gear) PTO without Flange & Interior Control Unit
- Cruise Control
- Drum Brake
- Engine Brake
 Electrically Operated Wind
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
 Switchable Air Compressor for Improved Fuel Economy
- Lumbar Support
- Anti-Lock Brake System (ABS)
- Brake Lining Wear Indicator
- Immobilizer
- Home Safe Light
- Approach Light
- Differential Lock
- Digital Tachograph
- Front Towing Hooks (Double Hook)
- Short Bumper
- DAB Radio***
- Automatic Traction Control (ATC)
- Electronic Brake System (EBS) and Electronic Stability Control (ESP)
- Advanced Driver-Assistance Systems (Cybersecurity Improvements, Rear View Camera, Moving-off Information System, Blind Spot Information System, Tire Pressure Monitoring System, Emergency Stop Signal, Alcohol Interlock Facilitation, Traffic Sign Recognition, Driver Alert System, Lane Keeping Alert)

OPTIONAL EQUIPMENT

- Automated Transmission (with Normal Mode, Off-Road Mode, Rocking Mode)
- Engine Driven PTO & Interior Control Unit
- Transmission Driven PTO Options & Interior Control Unit
- Auxiliary Cabin Heater (Wet Type)
- Cold Pack with Wet Type Cab Heater*
- Power Cab Tilting
- Rear Window **
- 4750 mm Wheelbase Version
- Double Passenger Seat
- Extra Heavy Duty Pack (Available With 13R 22,5 Tyre)
- O2 up to 3,5T towing capability
- O3 up to 10T towing capability
- O4 more than 10T towing capability
- Manually Operated Sunroof
- Front Vehicle Antiroll Bar
- Oil Pan Protection
- Multileaf Spring Front Suspension
- Lateral Protection
- Reinforced Wheel Rim
- Less Spare Tire
- Rear Towing Hook Option
- Twin PTO (high ratio) / Twin PTO (low ratio)****
- Retarder
- Rain Sensor
- Led Headlamps

* Not Available with 4750 mm Wheelbase Version. ** Not Available with Low Roof Sleeper Cab Version.

*** DAB Radio can be standard or optional according to the market. ****Only available with Automated Transmission.

This leaflet includes products designed for Ford vehicles. It provides information about the current technical specifications and the standard or optional accessories available as of the date it was issued. Features of standard and optional accessories of the vehicles may be changed from time to time. For this reason, please consult our Authorized Dealers to obtain updated and accurate information on the features of the vehicle you wish to buy. For the aforementioned reason, this leaflet does not constitute an assurance as to the specifications listed herein. The images used in this leaflet may be different from the vehicles on sale. The technical specifications.