
FORD TRUCKS 4142XD EURO6



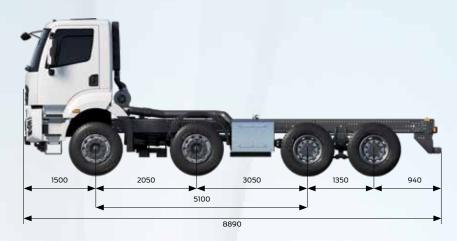

| Basic Features | |
|----------------|---------|
| Vehicle Type | Tipper |
| Axle | 8x4 |
| Emission | Euro 6 |
| Cabin Type | Day Cab |
| Wheelbase (mm) | 5100 |

| Engine | |
|--------------------|-------------------------------|
| Type | Ecotorq 12,7 litre |
| Displacement (cc) | 12740 |
| Diameter x Stroke | 130 mm x 160 mm |
| Power | 420 PS (308,9 kW) / 1800 rpm |
| Torque | 2150 Nm / 1000-1300 rpm |
| Compression Ratio | 17 +/- 0,5 : 1 |
| Oil Filling Volume | 50 L |

| Coolant Volume |
|----------------|
| Transmission |

Clutch 2 x 400 mm Twin Clutch

Manuel Transmission / Ratios (1. gear - 16. gear) ZF 16S 2530 (13,805-0,836)

Automated Transmission / Ratios (1. gear - 16. gear) Ecotorq 16S 2600 OD (14,107 - 0,823)

Steering

Electro-Hydraulic Power-Assisted Steering System (EHPAS)

57 L (with Retarder 77 L)

| Chassis | | | | | |
|---------------------------------|--|--|--|--|--|
| Chassis Thickness | 10 mm with Reinforcement | | | | |
| Chassis Strength | 500 MPa | | | | |
| Suspension (Front / Rear) | Parabolic Leaf Springs / Parabolic Tandem Suspension | | | | |
| Axle | Hub Reduction | | | | |
| Axle Ratio (Manual / Automatic) | 4,87 / 4,08 | | | | |
| Tyres | 13 R22,5 | | | | |
| Wheel Rim | 22,5 x 9 Steel | | | | |
| Braking System | | | | | |

| Braking System | |
|---------------------------|------------------------------------|
| Brakes (Ø mm x mm Length) | 410 X 200, Z-Cam Drum Brake System |

Braking System

Dual Brake Circuit – Air Processing Unit with Integrated Oil Seperator and Heater
Engine Brake Power

max. 320 kW (Engine Level)

Retarder Power max. 450 kW / continuous 160kW

Electrical System

Battery 225 Ah Alternator / Starter Motor 130 A / 6,5 kW

Tanks Fuel Tank 315 L Steel SCR Tank 55 L



| Dimensions (mm) | | | | | |
|---------------------------------------|---------|---------|---------|---------|-------|
| Front Overhang | | | 1500 | | |
| Wheelbase | | | 5100 | | |
| Overall Length | | | 8890 | | |
| Overall Vehicle Height | | | 3254 | | |
| Overall Cab Length | | | 1820 | | |
| Rear Overhang | | | 940 | | |
| Useful Chassis Length | | | 6494 | | |
| Overall Vehicle Width (Excl. Mirrors) | | | 2540 | | |
| Ground Clearance - Front | | | 455 | | |
| Ground Clearance - Rear | | | 390 | | |
| Overall Vehicle Width (Excl. Mirrors) | | | 2540 | | |
| Weights (kg) | 1. Axle | 2. Axle | 3. Axle | 4. Axle | Total |
| Tochnically Dormicsible Weights | 9000 | 9000 | 12400 | 12400 | 41000 |

| Weights (kg) | 1. Axle | 2. Axle | 3. Axle | 4. Axle | Total |
|---------------------------------|---------|---------|---------|---------|-------|
| Technically Permissible Weights | 8000 | 8000 | 13400 | 13400 | 41900 |
| Kerb Weight | 3894 | 3900 | 2090 | 2090 | 11793 |
| Payload | 4106 | 4100 | 11310 | 11310 | 30107 |
| GVM (Legal) | 8000 | 8000 | 9500 | 9500 | 32000 |

STANDARD EQUIPMENT

- Extra Heavy Duty Features (Twin Clutch, 13R 22.5 Tyre, Fuel Tank Guard, Parabolic Tandem Suspension)
- Manuel Air Conditioner
- Multimedia System with 9" Touch Screen & Navigation (Radio, Bluetooth, USB (A Type - C Type), Apple CarPlay, Android Auto, Remote Control)
- Transmission Offset (double gear) PTO without Flange
- 4 Point Independent Cab Suspension for Day Cab
- Drum Brake
- Cruise Control
- **Electrically Operated Windows**
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Short Bumper
- Front Vehicle Antiroll Bar
- Anti-lock Brake System (ABS)
- Brake Lining Wear Sensor
- **Immobilizer**
- Home Safe
- Approach Lights
- Differential Lock
- Digital Tachograph
- Switchable Air Compressor (For Improved Fuel Economy)
- Front Towing Hooks (Double Hook)
- Reinforced Wheel Rim
- DAB Radio**
- Advanced Driver-Assistance Systems (Cybersecurity Improvements, Rear View Camera, Moving-off
 Information System, Blind Spot Information System, Tire
 Pressure Monitoring System, Emergency Stop Signal,
 Alcohol Interlock Facilitation, Traffic Sign Recognition,
 Driver Alert System, Lane Keeping Alert)
- Electronic Brake System (EBS) and Electronic Stability Control (ESP)
- Automatic Traction Control (ATC)

OPTIONAL EQUIPMENT

- Automated Transmission (with Normal Mode, Off-Road Mode, Rocking Mode)
- Engine Driven PTO and Interior Control Unit ****
- Transmission Driven PTO Options & Interior Control Unit
- Retarder
- Auxiliary Cabin Heater (Wet Type)
- Cold Pack with Wet Type Cab Heater and 225 Ah Battery
- Electrically Operated Cab Tilting
- Oil Pan Protection
- Dual Passenger Seat *
- Manually Operated Sunroof
- Low Roof Sleeper Cab
- Lateral Protection
- Rear Window
- Less Spare Tire
- Rear Towing Hook
- Twin PTO (high ratio) / Twin PTO (low ratio)***
- Led Headlamps

*Not available with Low Roof Sleeper Cab. **DAB Radio can be standard or optional according to the market.