



Technical Features

# F-LINE 6x2 Road Series

\*The vehicle image may differ from the actual vehicle.











| Standard and Optional Features   | 2533    |                      |                       | 2633    |                      |                       | 2645T                |                       |
|--|---------|----------------------|-----------------------|---------|----------------------|-----------------------|----------------------|-----------------------|
|  | Day Cab | Low Roof Sleeper Cab | High Roof Sleeper Cab | Day Cab | Low Roof Sleeper Cab | High Roof Sleeper Cab | Low Roof Sleeper Cab | High Roof Sleeper Cab |
| Exterior   |         |                      |                       |         |                      |                       |                      |                       |
| Full Trailer - O3 (up to 10T towing capability)                            | ○       | ○                    | ○                     | -       | -                    | -                     | -                    | -                     |
| Full Trailer - O4 (more than 10T towing capability) (Coupling Pin: 50 mm)  | -       | -                    | -                     | -       | -                    | -                     | ●                    | ●                     |
| Full Trailer - O4 (more than 10T towing capability) (Coupling Pin: 40 mm)  | -       | -                    | -                     | -       | -                    | -                     | ○                    | ○                     |
| Air Brake Compressor (Double Cylinder)                                     | ○       | ○                    | ○                     | ○       | ○                    | ○                     | -                    | -                     |
| Switchable Air Brake Compressor  | -       | -                    | -                     | -       | -                    | -                     | ●                    | ●                     |
| Smart Tachograph   | ●       | ●                    | ●                     | ●       | ●                    | ●                     | ●                    | ●                     |
| Medium Bumper  | ●       | ●                    | ●                     | ●       | ●                    | ●                     | ●                    | ●                     |
| Body Color Bumper  | -       | ●                    | ●                     | -       | ●                    | ●                     | ●                    | ●                     |
| Torq Black Bumper  | ●       | ○                    | ○                     | ●       | ○                    | ○                     | ○                    | ○                     |
| Cold Pack  | ○       | ○                    | ○                     | ○       | ○                    | ○                     | ○                    | ○                     |
| Rear Towing Hooks  | ○       | ○                    | ○                     | -       | -                    | -                     | -                    | -                     |
| Front Towing Hook  | ○       | ○                    | ○                     | ○       | ○                    | ○                     | ○                    | ○                     |
| Double Front Towing Hooks  | ○       | ○                    | ○                     | ○       | ○                    | ○                     | ○                    | ○                     |
| Beacon Lamp  | ○       | ○                    | ○                     | ○       | ○                    | ○                     | -                    | -                     |
| Double Roof Beacon Lamp (Passenger Side Lamp & Driver Side Infrastructure) | ○       | ○                    | ○                     | ○       | ○                    | ○                     | ○                    | -                     |

● Standard ○ Optional


2533 & 2633 DC

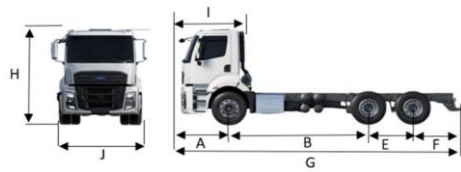


2533 & 2633 LRSC

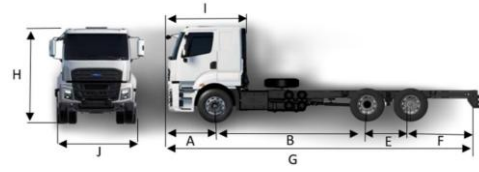

2645T HRSC

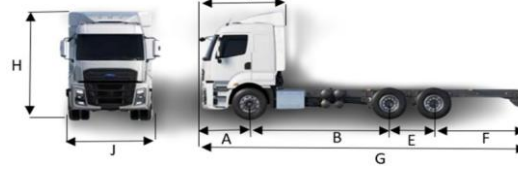

2533 & 2633 HRSC

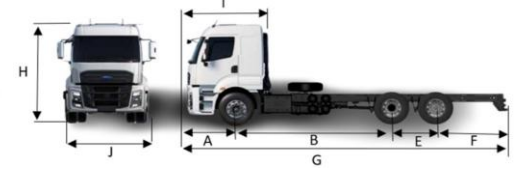

| Dimensions (mm)                                | 2533    |                      |                       | 2633    |                      |                       | 2645T                 |                      |
|--|---------|----------------------|-----------------------|---------|----------------------|-----------------------|-----------------------|----------------------|
|  | Day Cab | Low Roof Sleeper Cab | High Roof Sleeper Cab | Day Cab | Low Roof Sleeper Cab | High Roof Sleeper Cab | High Roof Sleeper Cab | Low Roof Sleeper Cab |
| Wheelbase (B)                                  | 4250    | 4750                 | 4750                  | 4250    | 4750                 | 4750                  | 4750                  | 4750                 |
| Overall Length (G)                             | 8890    | 9809                 | 9809                  | 9383    | 9925                 | 9866                  | 9809                  | 9980                 |
| Front Overhang (A)                             | 1437    | 1437                 | 1437                  | 1437    | 1450                 | 1437                  | 1437                  | 1450                 |
| Rear Overhang (F)                              | 1877    | 2339                 | 2339                  | 2343    | 2375                 | 2339                  | 2339                  | 2380                 |
| Distance Between 1st and 2nd Wheel Centers (B) | 4250    | 4740                 | 4740                  | 4250    | 4750                 | 4740                  | 4740                  | 4750                 |
| Distance Between 2nd and 3rd Wheel Centers (E) | 1350    | 1350                 | 1350                  | 1350    | 1350                 | 1350                  | 1350                  | 1350                 |
| Overall Vehicle Width (Excluding Mirrors) (J)  | 2540    | 2540                 | 2540                  | 2540    | 2540                 | 2540                  | 2540                  | 2540                 |
| Overall Cab Length (I)                         | 1744    | 2215                 | 2215                  | 1777    | 2226                 | 2226                  | 2226                  | 2226                 |
| Total Vehicle Height (H)                       | 3071    | 3283                 | 3350                  | 2992    | 3123                 | 3283                  | 3283                  | 3123                 |
| Turning Radius                                 | 10340   | 10950                | 10950                 | 10130   | 10870                | 10870                 | 10950                 | 10870                |
| Useful Chassis Length                          | 6573    | 7202                 | 7202                  | 7053    | 7125                 | 7150                  | 7202                  | 7130                 |

| Weights (kg)                     |                                | 1st Axle | 2nd Axle | 3rd Axle | Total |
|----------------------------------|--------------------------------|----------|----------|----------|-------|
| 2533<br>(Day Cab)                | Technically Permissible Weight | 7500     | 12000    | 8700     | 25000 |
|                                  | Kerb Weight                    | 4816     | 1813     | 1412     | 8041  |
|                                  | Payload                        | 2684     | 10187    | 7288     | 16959 |
|                                  | Regulatory Permissible Weight  | 7500     | 11500    | 8700     | 25000 |
| 2533<br>(Low Roof Sleeper Cab)   | Technically Permissible Weight | 7500     | 12000    | 8700     | 25000 |
|                                  | Kerb Weight                    | 5052     | 1929     | 1555     | 8536  |
|                                  | Payload                        | 2448     | 10071    | 7145     | 16464 |
|                                  | Regulatory Permissible Weight  | 7500     | 11500    | 8700     | 25000 |
| 2533<br>(High Roof Sleeper Cab)  | Technically Permissible Weight | 7500     | 12000    | 8700     | 25000 |
|                                  | Kerb Weight                    | 5099     | 1929     | 1555     | 8583  |
|                                  | Payload                        | 2401     | 10071    | 7145     | 16417 |
|                                  | Regulatory Permissible Weight  | 7500     | 11500    | 8700     | 25000 |
| 2633<br>(Day Cab)                | Technically Permissible Weight | 7500     | 11500    | 7500     | 26000 |
|                                  | Kerb Weight                    | 4627     | 1942     | 1249     | 7818  |
|                                  | Payload                        | 2873     | 9558     | 6251     | 18182 |
|                                  | Regulatory Permissible Weight  | 7500     | 11500    | 7500     | 26000 |
| 2633<br>(Low Roof Sleeper Cab)   | Technically Permissible Weight | 7500     | 11500    | 7500     | 26000 |
|                                  | Kerb Weight                    | 4865     | 1968     | 1379     | 8212  |
|                                  | Payload                        | 2635     | 9532     | 6121     | 17788 |
|                                  | Regulatory Permissible Weight  | 7500     | 11500    | 7500     | 26000 |
| 2633<br>(High Roof Sleeper Cab)  | Technically Permissible Weight | 7500     | 11500    | 7500     | 26000 |
|                                  | Kerb Weight                    | 4912     | 1968     | 1379     | 8259  |
|                                  | Payload                        | 2588     | 9532     | 6121     | 17741 |
|                                  | Regulatory Permissible Weight  | 7500     | 11500    | 7500     | 26000 |
| 2645T<br>(High Roof Sleeper Cab) | Technically Permissible Weight | 7500     | 11500    | 7500     | 26000 |
|                                  | Kerb Weight                    | 5544     | 1776     | 1579     | 8899  |
|                                  | Payload                        | 1956     | 9724     | 5921     | 17101 |
|                                  | Regulatory Permissible Weight  | 7500     | 11500    | 7500     | 26000 |
| 2645T<br>(Low Roof Sleeper Cab)  | Technically Permissible Weight | 7500     | 11500    | 7500     | 26000 |
|                                  | Kerb Weight                    | 5485     | 1776     | 1579     | 8840  |
|                                  | Payload                        | 2015     | 9724     | 5921     | 17160 |
|                                  | Regulatory Permissible Weight  | 7500     | 11500    | 7500     | 26000 |

\*The kerb weight data includes a 90% full fuel tank, other fluids, tools, a spare tire, and a driver weighing 75 kg. Weight values may vary depending on the vehicle configuration.

This leaflet includes products designed for Ford vehicles. It provides information about the current technical specifications and the standard or optional accessories available as of the date it was issued. Features of standard and optional accessories of the vehicles may be changed from time to time. For this reason, please consult our Authorized Dealers to obtain updated and accurate information on the features of the vehicle you wish to buy. For the aforementioned reason, this leaflet does not constitute an assurance as to the specifications listed herein. The images used in this leaflet may be different from the vehicles on sale. The technical specifications provided herein are for standard vehicles. Selection of any optional accessories might cause differences from these specifications.

